




RUBBER LINE DIAPHRAGM




RUBBER/PTFE LINE DIAPHRAGM

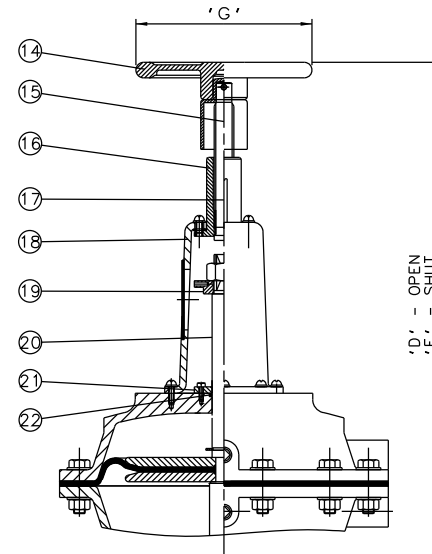

MANUAL OVERRIDE WITH HANDWHEEL (OPTIONAL)

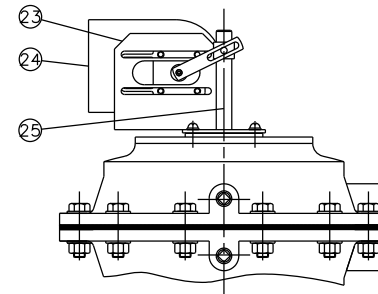

'007' SWITCHBOX (OPTIONAL)

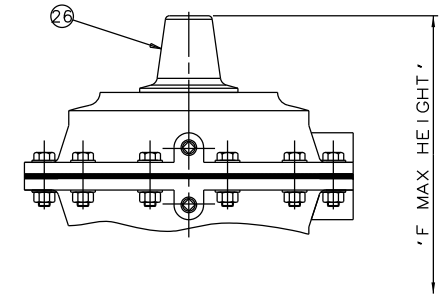

'F' MAX HEIGHT

Item	Component	Material
1	UPPER CYLINDER	SILICON ALUM.
2	UPPER DIAPHRAGM PLATE	MILD STEEL
3	LOWER DIAPHRAGM PLATE	MILD STEEL
4	OPERATING DIAPHRAGM	RUBBER
5	LOWER CYLINDER	SILICON ALUM.
6	CYLINDER 'O' RING	NITRILE
7	MASTER SPINDLE	STAINLESS STEEL
8	SPINDLE ATTACHMENT	STAINLESS STEEL
9	BONNET	CAST IRON
10	COMPRESSOR	CAST IRON
11	LINE DIAPHRAGM	RUBBER
12	BODY	CAST IRON
		S. G. IRON
		STAINLESS STEEL
		GUNMETAL
13	LINE DIAPHRAGM	RUBBER/PTFE
14	HANDWHEEL	CAST IRON
15	HANDWHEEL SPINDLE	MILD STEEL
16	SPINDLE BUSH	MILD STEEL
17	INDICATOR ROD	MILD STEEL
18	COVER	SILICON ALUM.
19	UPPER SPRING PLATE	MILD STEEL
20	GUIDE ROD	MILD STEEL
21	SEALING PLATE	MILD STEEL
22	SEALING PLT. 'O' RING	RUBBER
23	MOUNTING BRACKET	STAINLESS STEEL
24	'007' SWITCHBOX	
25	LIFTING ROD	STAINLESS STEEL
26	INDICATOR COVER	POLAMIDE

Size(DN)	A	B	C	D	E	F	G
50	305	190	230	610	576	379	170
65	313	216	290	620	586	390	170
80	315	254	310	622	588	392	230
100	339	305	350	662	619	417	280

The information on this sheet is Private and Confidential and is the property of Crane Process Flow Technologies Limited and must not be published directly or indirectly in any manner whatsoever without the written permission of the Company and must not be used in any way detrimental to their interests.
© Crane Process Flow Technologies

CRANE Process Flow Technologies
A Crane Co. Company

Saunders
The Science Inside

Title			
GENERAL ARRANGEMENT OF 'A' TYPE ES56 DOUBLE ACTING ACTUATOR (D8200) COMPLETE WITH OPTIONS FITTED ON UNLINED FLANGED BODY			
Drawn NAW	Date 20.11.13	UNCONTROLLED IN HARD COPY FORMAT	
Checked RND	Date 20.11.13		
First Angle Projection Method E	DO NOT SCALE	Drawing No. A-ES56-UNLINED	Issue. 1