


CRANE® FK-TrieX™ - Full Port Triple Offset Isolation Valves For Severe Service




NEW!

HIGH Cv VALVE WITH CAVITY FREE DESIGN THAT PROVIDES ZERO LEAKAGE SHUTOFF

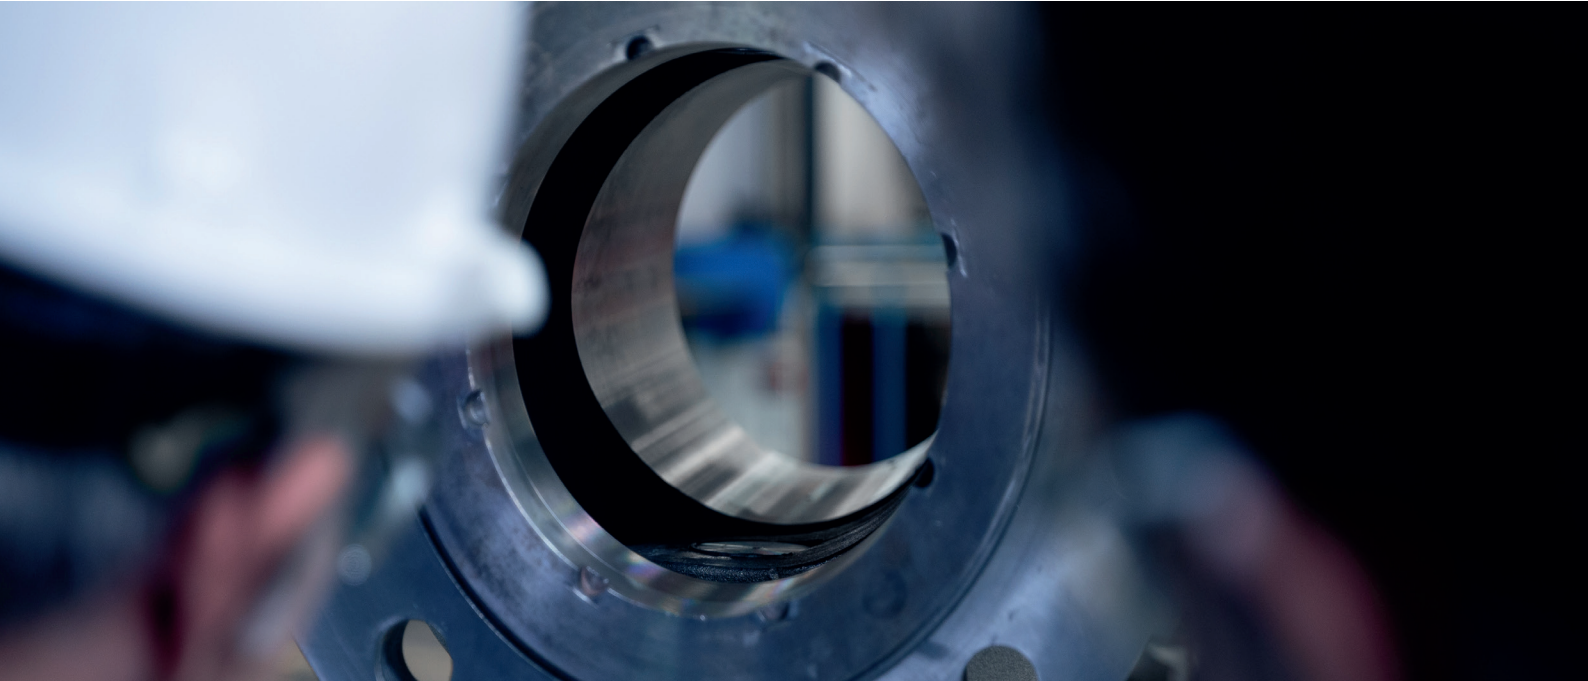


For severe service applications where safety, reliability, and efficient operation are paramount, the new FK-TrieX provides:

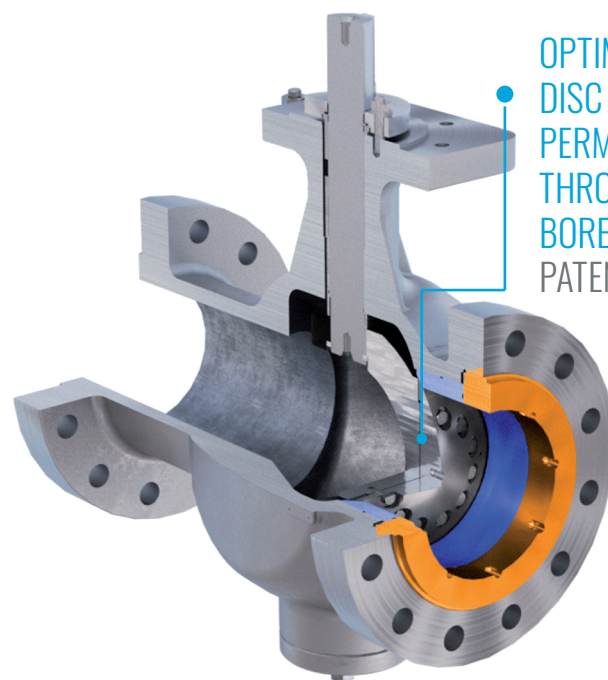- ✓ bi-directional bubble tight shutoff
- ✓ unobstructed flow & high Cv
- ✓ cavity free self-cleaning design
- ✓ superior fugitive emissions control
- ✓ high reliability
- ✓ ease of serviceability
- ✓ less weight, low total cost of ownership



OPTIMIZED DISC DESIGN PERMITS GREATER THROUGHPUT / FULL BORE OPERATION
PATENT PENDING

CRANE® FK-TrieX™ Features and Benefits

SAFETY 	RELIABLE OPERATIONS 	LOW OVERALL COST 
<ol style="list-style-type: none"> 1. Proven Triple Offset Sealing Provides repeatable bi-directional zero leakage shutoff per API 598 2. Torque Assisted Seating Yields a better seal due to evenly distributed compression of the seal along the entire sealing area 3. Superior Fugitive Emissions Control Per ISO 15848-1 AH CO2 SSA0 & API 641 4. Fire Safe Design Per API 607 standard 5. Blow Out Proof Stem Design 6. Single Piece Body Eliminates additional leak path to atmosphere 	<ol style="list-style-type: none"> 7. Cavity-less Self-Cleaning Design Ensures solids do not get trapped in valve crevices eliminating premature failure and jamming 8. Standard Pressure Tight Bearing Design eliminates problems of valve jamming and increased torque from polymerization and crystallization 9. Reduced Friction Sealing Minimizes wear that is typically seen in other technologies due to spring force or other impinging force on seat 10. Replaceable Stellite Welded Seat & Flexible Laminate Seals Provide excellent shutoff and 2x life than stainless seats. 40 RC hardness rating 11. API 6D Standard Full-Bore Design Allows Pipeline Inspection Gauges (PIGs) and cleaning scrapers to pass through the valve in full open condition 12. Optimal Flow Profile In addition to standard full-bore design provides high Cv and low pressure drop across the valve 	<ol style="list-style-type: none"> 13. Modular Seat and Seal Design Enables replacement of seat (TrieX ring) and laminate seals without having to replace the entire valve, and also reduces maintenance time and cost 14. Quarter Turn Design Eliminates the need for complex actuators 15. Single Piece Body Reduces weight by 10% thereby reducing structural support costs 16. Same Face to Face Dimensions as Other Technologies Per ASME B16.10 Long Pattern minimizes need for piping modifications

Materials of Construction

- WCB, WCC, LCB, LCC, WC6, WC9, C12 CF3M, CF8M; Duplex, Super Duplex, Monel®, Inconel, Hastelloy, Titanium, Zirconium

Size Range

- 3" up to 24" in a single piece cast body design

Pressure Ratings

- ASME Class 150, 300, 600

Temperature Range

- -76°F up to 1022°F; -60°C up to 550°C, depending on material

Body Configurations


- ASME B16.10: Double Flanged Long

Standard Options

- Pressure Tight Bearing Design

Typical Applications

- Molecular Sieve Packages
- Chemical Processing
 - Aromatics & Derivatives
 - Chlor Alkali & Chlorinated Hydrocarbons
 - Fluorinated Hydrocarbons
 - Industrial Gases
 - Inorganic Chemicals
 - Inorganic Pigments
 - Nitrogenous Fertilizers
 - Olefins & Derivatives
 - Organic Compounds
 - Phosphatic Fertilizers
 - Specialty Chemicals
 - Synthetic Polymers, Plastics & Resins
- Refining
- Terminals
- Pulp & Paper
- Carbon Capture & Sequestration

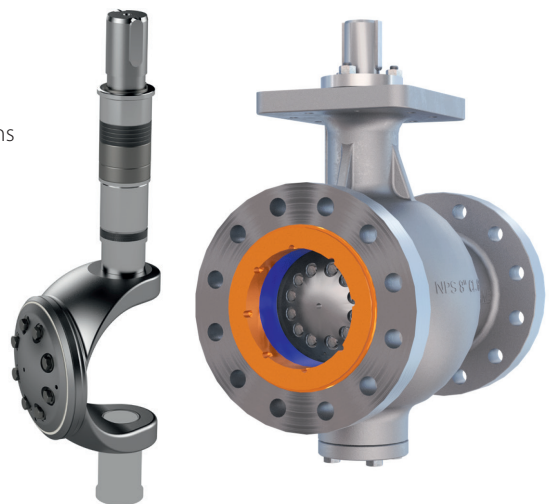

CRANE CHEMPHARMA & ENERGY

ARMATURE d.o.o.
Koroška cesta 55
2366 Muta,
Slovenia
Tel.: +386 2 87 70 500

Crane Co., and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Co. reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All trademarks in this material are the property of the Crane Co. or its subsidiaries. The Crane and Crane brands logotype (CENTER LINE®, COMPAC-NOZ®, CRANE®, DEPA® & ELRO®, DOPAK®, DUO-CHEK®, FLOWSEAL®, GYROLOK®, GO REGULATOR®, HOKE®, JENKINS®, KROMBACH®, NOZ-CHEK®, PACIFIC VALVES®, RESISTOFLEX®, REVO®, SAUNDERS®, STOCKHAM®, TEXAS SAMPLING®, TRIANGLE®, UNI-CHEK®, VALVES®, WESTLOCK CONTROLS®, WTA®, and XOMOX®) are registered trademarks of Crane Co. All rights reserved.