

Saunders[®] Pure Performance (Bioseal) Manual Bonnet

www.cranecpe.com

The Pure Performance Bonnet is for use on DN (0.25") bodies - note Pure Performance (Bioseal) bodies have DN8 (0.25") weir but are available with bore and ends in sizes DN8-DN10-DN15 (0.25" - 0.375" - 0.50")

Key features include:

- FDA conforming PPS Poly-phenylenesulphide bonnet shell and hand wheel
- Optional stainless steel shell.
- Features smooth exterior contour
- O-ring sealed
- Resistant to wash down chemicals
- Suitable for process lines subject to Steam-in-Place (SIP)
- Polymer hand wheel reduces heat transfer
- Fully autoclavable to 140°C
- Stainless steel compressor
- High visibility yellow indicator sleeve




Optional stainless steel base available upon request.

CRANE[®]

Saunders® Pure Performance (Bioseal) Manual Bonnet

Bonnet Dimensions

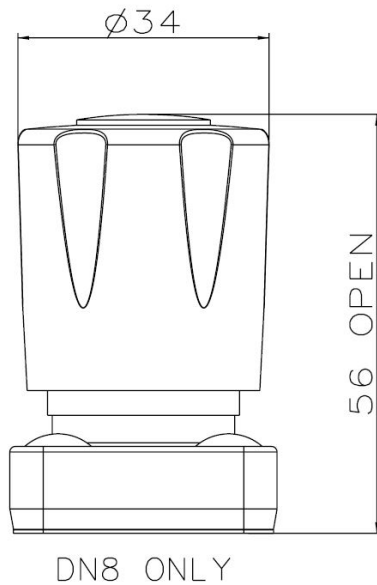

Dimensions and Weights

Valve Size	Weight	
	kg	lbs
Polymer	0.1	0.2
Stainless Steel	0.2	0.4

Please visit our web-based drawing library at:
www.saundersdrawings.com

Grange Road, Cwmbran
Gwent NP44 3XX,
United Kingdom
Phone: +44 1633 486666
Fax: +44 1633 486777
www.cranecpe.com

Crane ChemPharma & Energy, Saunders®

Crane Co., and its subsidiaries cannot accept responsibility for possible errors in catalogues, brochures, other printed materials, and website information. Crane Co. reserves the right to alter its products without notice, including products already on order provided that such alteration can be made without changes being necessary in specifications already agreed. All trademarks in this material are property of the Crane Co. or its subsidiaries. The Crane and Crane brands logotype, in alphabetical order, (ALOYCO®, CENTER LINE®, COMPAC-NOZ®, CRANE®, DEPA®, DUO-CHEK®, ELRO®, FLOWSEAL®, JENKINS®, KROMBACH®, NOZ-CHEK®, PACIFIC VALVES®, RESISTOFLEX®, REVO®, SAUNDERS®, STOCKHAM®, TRIANGLE®, UNI-CHEK®, WTA®, and XOMOX®) are registered trademarks of Crane Co. All rights reserved.