

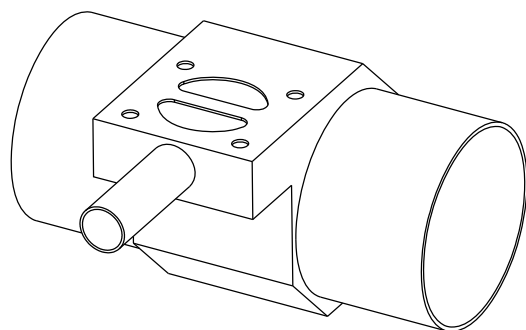
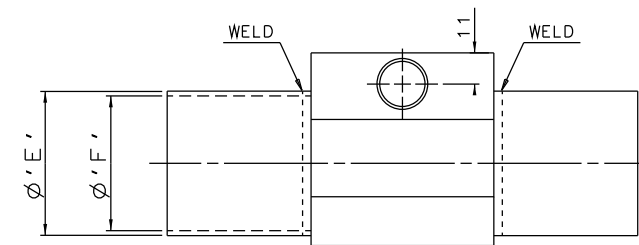
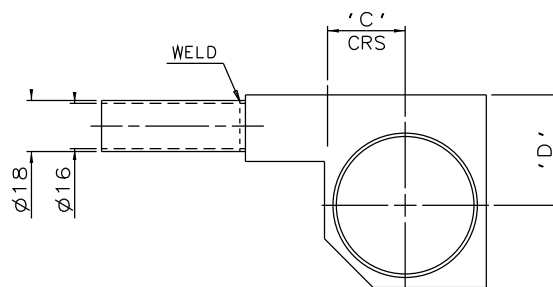


DN20 MAINLINE ONLY

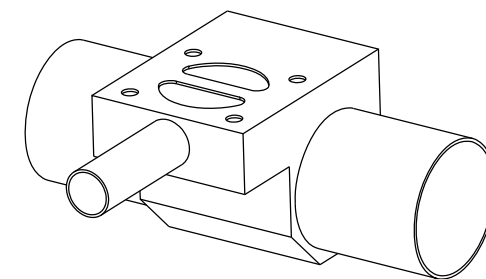


DN80 TO DN100
MAINLINE ONLY

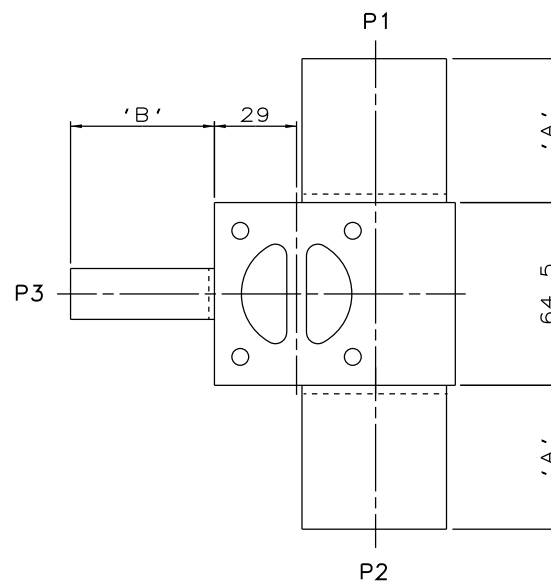

DN25 TO DN65
MAINLINE ONLY

MAINLINE SIZE mm	A mm	B mm	C mm	D mm	ϕE mm	ϕF mm	BODY WEIGHT Kgs
DN20	50.8	50.8	11.6	20.0	18.0	16.0	0.8
DN25	50.8	50.8	14.9	26.0	25.0	22.6	0.8
DN40	50.8	50.8	20.5	33.5	38.0	35.6	1.0
DN50	50.8	50.8	27.4	39.0	51.0	48.6	1.3
DN65	50.8	50.8	33.2	43.0	63.5	60.3	1.5
DN80	50.8	50.8	39.5	47.0	76.1	72.9	1.5
DN100	101.6	50.8	51.9	54.0	101.6	97.6	2.8



ORIENTATION AS
PER P&ID DIAGRAM
FOR OPTIMUM
DRAINABILITY.

The information on this sheet is Private and Confidential and is the property of Crane Process Flow Technologies Limited and must not be published directly or indirectly in any manner whatsoever without the written permission of the Company and must not be used in any way detrimental to their interests.
© Crane Process Flow Technologies

CRANE Process Flow Technologies
A Crane Co. Company

Saunders
The Science Inside

Title

SCHEDULE OF LEADING DIMENSIONS FOR DN20
WEIR 'T' BODY WITH BW SMS 3008 ENDS

Drawn JRD Date 24.02.12

Checked RND Date 24.02.12

UNCONTROLLED IN
HARD COPY FORMAT

First Angle
Projection
Method E

DO NOT
SCALE
Drawing No.
WEB-133
Issue.
1