

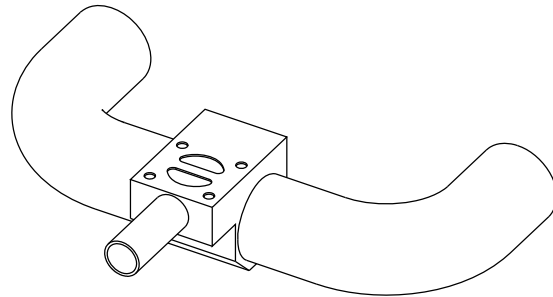
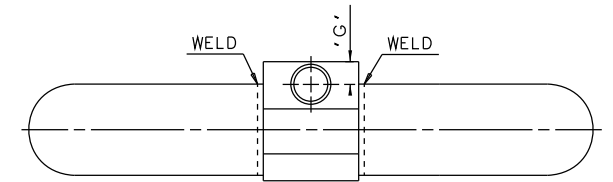




DN15 MAINLINE ONLY

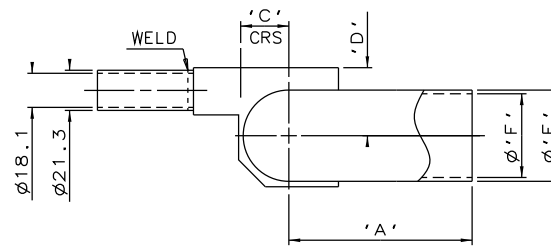


DN20 TO DN40
MAINLINE ONLY

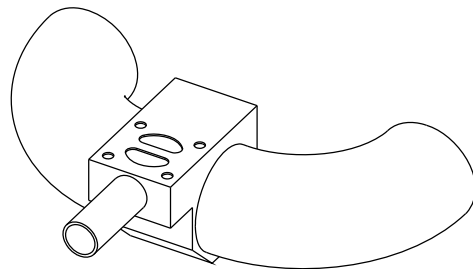

DN50 MAINLINE ONLY

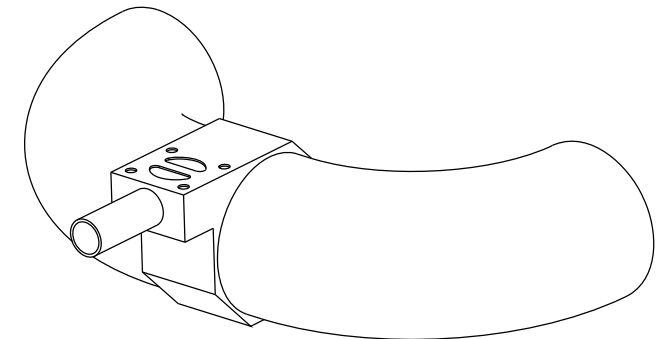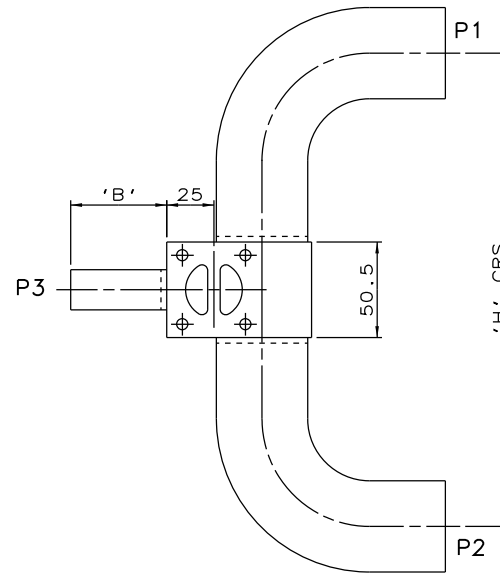

DN65 TO DN100
MAINLINE ONLY



ORIENTATION AS PER
P&ID DIAGRAM FOR
OPTIMUM DRAINABILITY.

MAINLINE SIZE mm	A mm	B mm	C mm	D mm	øE mm	øF mm	G mm	H mm	BODY WEIGHT Kgs
DN15	55.0	50.8	12.1	23.5	21.3	18.1	12.7	166.5	0.8
DN20	68.5	50.8	15.2	26.0	26.9	23.7	13.0	193.5	0.7
DN25	78.0	50.8	18.2	30.0	33.7	29.7	12.7	212.5	1.0
DN32	87.5	50.8	22.2	34.0	42.4	38.4	12.7	231.5	1.4
DN40	97.0	50.8	25.5	36.0	48.3	44.3	12.7	250.5	1.6
DN50	76.0	50.8	30.7	40.0	60.3	55.1	12.7	208.5	1.9
DN65	95.0	50.8	38.5	44.0	76.1	70.9	12.7	260.5	2.5
DN80	114.0	50.8	45.2	47.0	88.9	83.7	13.7	299.5	3.1
DN100	152.0	50.8	57.9	60.2	114.3	109.1	12.7	374.5	5.0


The information on this sheet is Private and Confidential and is the property of Crane Process Flow Technologies Limited and must not be published directly or indirectly in any manner whatsoever without the written permission of the Company and must not be used in any way detrimental to their interests.
© Crane Process Flow Technologies

CRANE Process Flow Technologies
A Crane Co. Company


Saunders
The Science Inside

Title
SCHEDULE OF LEADING DIMENSIONS FOR
DN15 WEIR POINT OF USE 'T' BODY WITH
ISO 1127 S1 BUTT WELD ENDS


Drawn R1	Date 10.04.12	UNCONTROLLED IN HARD COPY FORMAT	
Checked RND	Date 10.04.12		
First Angle Projection Method E	DO NOT SCALE	Drawing No. WEB-177	Issue. 1

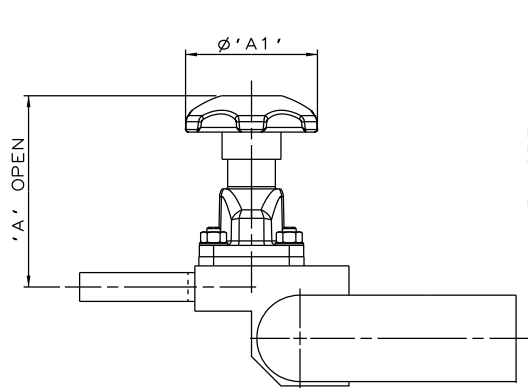


SS NON SEALED
BONNET ASSEMBLY

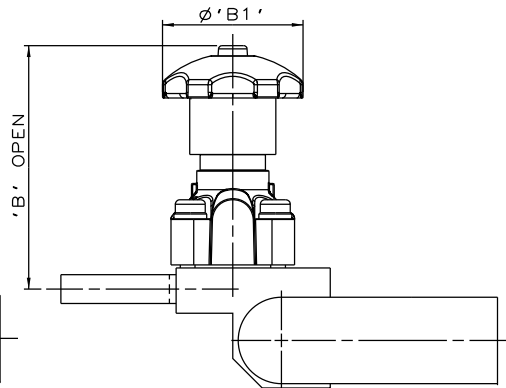


PES BONNET
ASSEMBLY

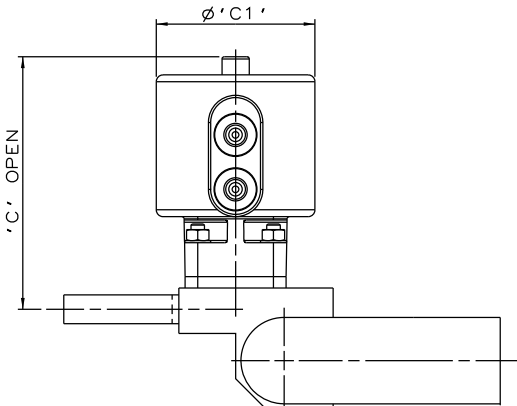


EC ACTUATOR
(ALL MODES)

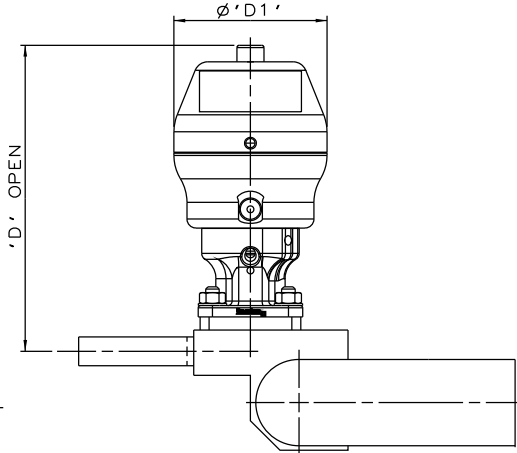

*S360 ACTUATOR

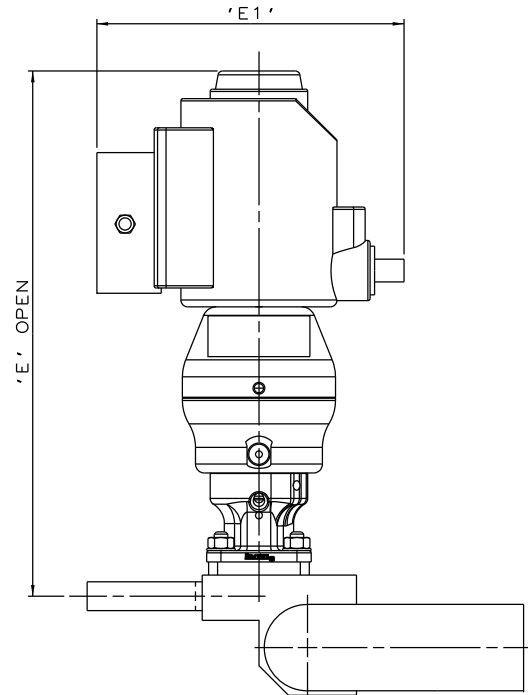

*S360 ACTUATOR
WITH I-VUE SENSOR

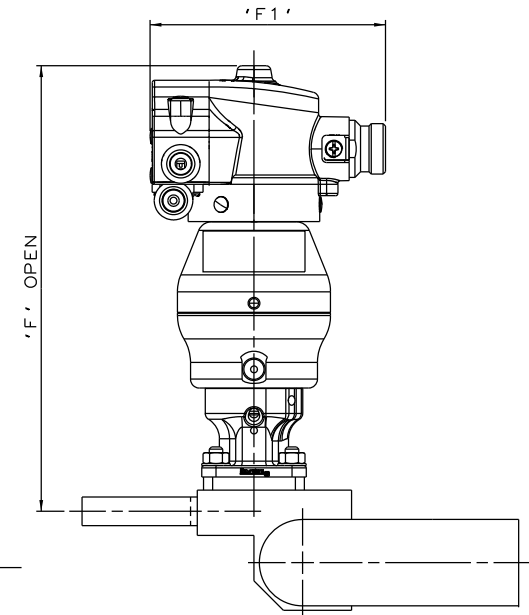

*S360 ACTUATOR
WITH M-VUE SENSOR

The information on this sheet is Private and Confidential and is the property of Crane Process Flow Technologies Limited and must not be published directly or indirectly in any manner whatsoever without the written permission of the Company and must not be used in any way detrimental to their interests.
© Crane Process Flow Technologies

CRANE Process Flow Technologies
A Crane Co. Company

Saunders
The Science Inside

Title
SCHEDULE OF LEADING DIMENSIONS FOR DN15/0.50 WEIR
T-BODY (DN15/0.50 BRANCH) WITH BUTT WELD ISO 1127 S1
ENDS, FITTED WITH TOPWORKS OPTIONS

Drawn RI	Date 09.05.17	UNCONTROLLED IN HARD COPY FORMAT
Checked RND	Date 09.05.17	
First Angle Projection Method E	DO NOT SCALE	Drawing No. WEB-177-ASSY
		Issue. 1

* DIMENSIONS SHOW MAXIMUM ENVELOPE FOR ALL MODES

BRANCH SIZE	A		A1		B		B1		C		C1		D		D1		E		E1		F		F1		
	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	mm	inch	
DN15	0.50	88.7	3.49	62.0	2.44	111.7	4.40	62.0	2.44	115.7	4.56	70.0	2.75	139.7	5.50	67.5	2.66	235.7	9.28	136.0	5.35	200.0	7.87	103.8	4.09