

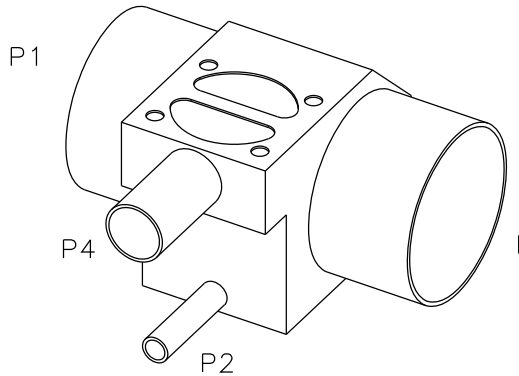
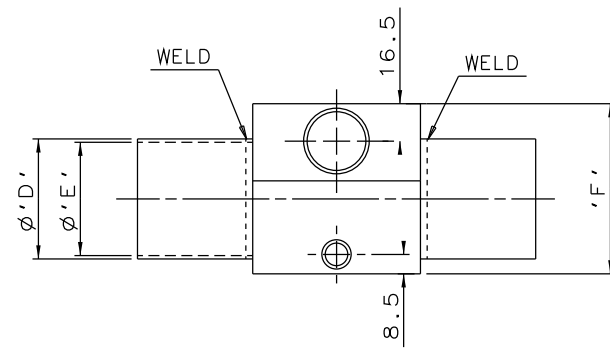
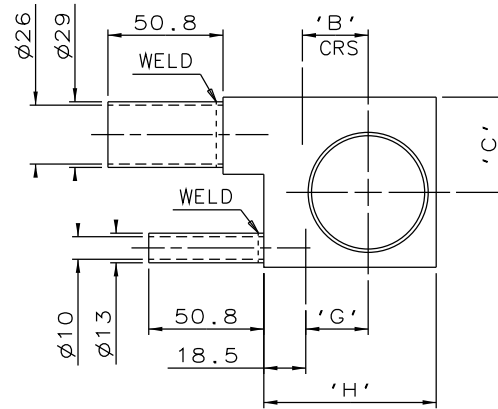


DN25 TO DN65  
MAINLINE ONLY



DN80 AND DN100  
MAINLINE ONLY

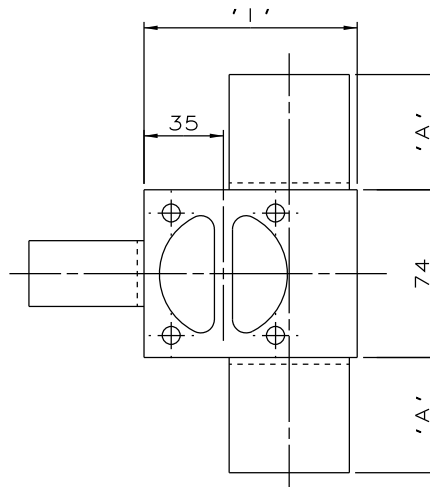

ORIENTATION AS  
PER P&ID DIAGRAM  
FOR OPTIMUM  
DRAINABILITY.

MAINLINE SIZE	A	B	C	$\phi D$	$\phi E$	F	G	H	I	BODY WEIGHT
mm	mm	mm	mm	mm	mm	mm	mm	mm	mm	Kgs
DN25	50.8	17.0	38.5	29.0	26.0	72.0	15.5	52.0	70.0	2.1
DN32	50.8	20.0	35.5	35.0	32.0	70.0	18.5	58.0	76.0	2.2
DN40	50.8	23.0	38.5	41.0	38.0	72.0	21.5	63.5	81.5	2.3
DN50	50.8	29.0	42.0	53.0	50.0	75.0	27.5	76.0	94.0	2.5
DN65	50.8	37.0	48.0	70.0	66.0	95.0	35.5	92.0	110.0	3.6
DN80	50.8	44.5	52.0	85.0	81.0	98.0	43.0	107.0	125.0	3.1
DN100	101.6	54.0	58.0	104.0	100.0	113.0	52.5	127.0	145.0	4.2

The information on this sheet is Private and Confidential and is the property of Crane Process Flow Technologies Limited and must not be published directly or indirectly in any manner whatsoever without the written permission of the Company and must not be used in any way detrimental to their interests.  
© Crane Process Flow Technologies

**CRANE** Process Flow Technologies  
A Crane Co. Company

**Saunders**  
The Science Inside

Title  
SCHEDULE OF LEADING DIMENSIONS FOR DN25  
WEIR 'T' BODY WITH DN8 BACK SAMPLE  
ALL ENDS BUTT WELD DIN 11850 S1/S2 TUBING

Drawn NAW	Date 22.11.12	UNCONTROLLED IN HARD COPY FORMAT	
Checked RND	Date 22.11.12	UNCONTROLLED IN HARD COPY FORMAT	
First Angle Projection Method E		DO NOT SCALE	Drawing No. WEB-254
			Issue. 1